


Data Center Storage Solutions

Powering the Data Revolution



For more than 50 years, Western Digital® has been enabling data at scale. Our data center SSDs, HDDs, fabric bridges, and platforms enable our customers to gain and leverage insights that they can extract from the zettabytes of data being generated by smart factories, connected endpoints, autonomous vehicles, IoT devices and more. Our robust portfolio and our outstanding customer service help companies and individuals transform their businesses with data.

Essential Data Infrastructure for the Zettabyte Age

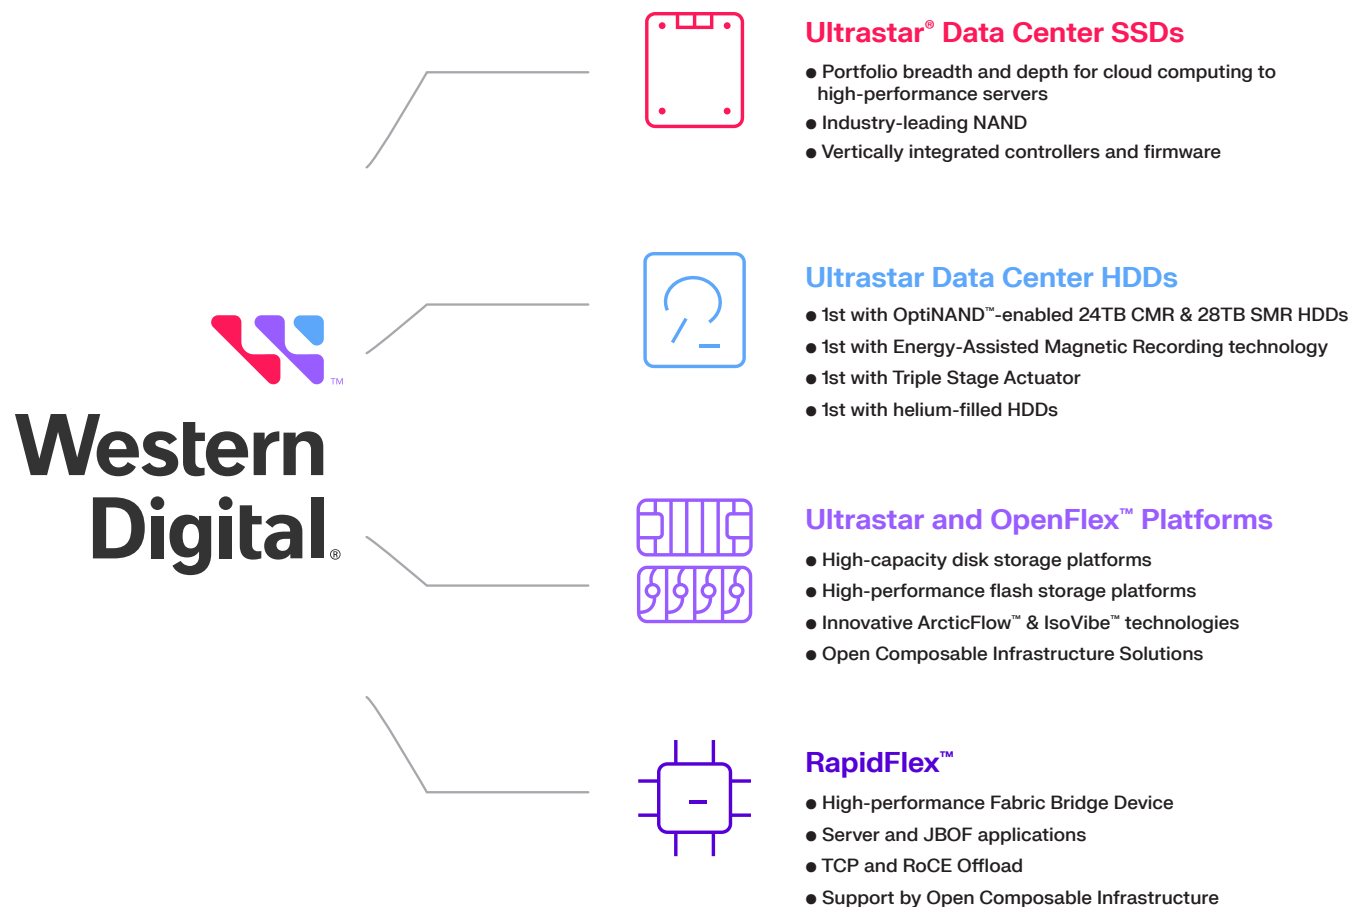

Trusted Storage Delivering Innovation Across All Technologies



NVMe™ SSDs

Low-latency, high-performance NVMe SSDs to accelerate your data center workloads



Helium-filled HDDs

Highest capacity HDDs for data center expansion and cost-efficient scale



Air-filled HDDs

Economical and reliable data access for traditional data center application



Platforms

Complete portfolio of storage platforms and servers for SATA, SAS, NVMe and NVMe-oF™



Fabric Bridges



Enable NVMe over fabrics (NVMe-oF) attached storage systems using fabric bridge devices and adapters









Optimize Your Data Center with Ultrastar SSDs

	Ultrastar DC SN655	Ultrastar DC SN650
Compute Intensive/HPC	✓	
All Flash Array Primary Storage	✓	
Relational Databases	✓	
Artificial Intelligence/Machine Learning	✓	✓
Converged/Hyperconverged Infrastructure	✓	✓
OLTP	✓	
OLAP	✓	
Virtualization	✓	✓
noSQL Databases	✓	✓
Content Caching	✓	✓
File/Object Storage	✓	✓
Cloud Compute/Cloud Storage	✓	✓

Ultrastar Data Center NVMe SSDs

	Performance NVMe		Mainstream NVMe
	 Ultrastar DC SN655		 Ultrastar DC SN650
Interface	PCIe Gen4 1x4, 2x2, NVMe 1.4		PCIe Gen4 1x4, NVMe 1.4
Form Factor	U.3, 15mm		U.3, 15mm
Endurance/Capacity (GB) ^{1,2}	1 DW/D: 3840, 7680, 15360		1 DW/D: 7680, 15360
NAND	3D TLC		
Seq R/W (MB/s), up to ³	6,800/3,700		6,600/2,800
Random R/W (KIOPS), up to	1,100/125		970/109
Reliability ⁴	Unrecoverable Bit Error Rate (UBER): 1 in 10 ¹⁷ MTBF (M hours): 2.5 AFR: 0.35%		Unrecoverable Bit Error Rate (UBER): 1 in 10 ¹⁷ MTBF (M hours): 2 AFR: 0.44%
Security	SE, ISE, TCG Ruby		SE, ISE

Ultrastar Data Center HDDs

	High Capacity Helium-filled Hard Drives				
	 Ultrastar DC HC680	 Ultrastar DC HC670	 Ultrastar DC HC580	 Ultrastar DC HC570	 Ultrastar DC HC560
Interface	SATA 6Gb/s	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s	SATA 6Gb/s, SAS 12Gb/s
Rotational speed (RPM)	7200				
Form Factor	3.5-inch data center HDD				
Capacity (TB)	28	26	24	22	20
Format	512e/4Kn	512e/4Kn	512e/4Kn	512e/4Kn	512e/4Kn
Sustained transfer rate (MB/s, max) ⁵	265/253	298/284	298/284	291/277	291/277
Idle_A (W), SATA/SAS ⁶	5.5	5.7/6.1	5.5	5.7/6.0	6.1/5.8
ArmorCache™	Yes				
Reliability ⁷	MTBF (M hours): 2.5 AFR: 0.35% Workloads: up to 550TB/year				
Security	Base (SE), SED, SED-FIPS				

Ultrastar Data Center HDDs

Helium-filled Hard Drives



**Ultrastar
DC HC550**






**Ultrastar
DC HC530**



**Ultrastar
DC HC520**

Interface	SATA 6Gb/s, SAS 12Gb/s		
Rotational speed (RPM)	7200		
Form Factor	3.5-inch data center HDD		
Capacity (TB)	18, 16	14	12
Format	512e		
Sustained transfer rate (MB/s, max) ⁵	269 (18TB) 262 (16TB)	267	243
Idle_A (W), SATA/SAS ⁶	5.6/5.8	5.5/5.9	5.0/6.1
ArmorCache™	Yes		
Reliability ⁷	MTBF (M hours): 2.5 AFR: 0.35% Workloads: up to 550TB/year		
Security	Base (SE), SED, SED-FIPS		

Ultrastar Data Center HDDs

	Air-filled Hard Drives			
				
	Ultrastar DC HC330	Ultrastar DC HC320	Ultrastar DC HC310	Ultrastar DC HA210
Interface	SATA 6Gb/s, SAS 12Gb/s			SATA 6Gb/s
Rotational speed (RPM)	7200			
Form Factor	3.5-inch data center HDD			
Capacity (TB)	10	8	6, 4	2, 1
Format	512e		512n available on 4TB capacity	
Sustained transfer rate (MB/s, max)	262	255	255 233 w/512n	200 (2TB) 184 (1TB)
Idle (W), SATA/SAS	8.0/9.0	7.4/8.4	5.9/7.0	5.9/NA
Reliability	MTBF (M hours): 2 AFR: 0.44% Workloads: up to 550TB/year			
Security	Base (SE), SED, SED-FIPS			SE

Ultrastar Data Center Platforms

Hybrid Storage Platforms






Ultrastar Data60



Ultrastar Data102



Storage Type	HDD	
Interface	SATA/SAS	
# Drives (up to)	60	102
Capacity (up to)	1.56PB	2.65PB
Dimension	4U	
Features	IsoVibe ArcticFlow	



	NVMe-oF Storage Platforms	
	 OpenFlex Data24	 OpenFlex Data24 3200
Storage Type	SSD	SSD
Interface	NVMe (NVMe-oF) 2, 4, or 6 RapidFlex NICs	NVMe (NVMe-oF) 6 RapidFlex NICs
Connection Type	RoCE	RoCE or TCP
# Drives (up to)	24	24
Capacity (up to)	368TB	368TB
Dimension	2U	2U

RapidFlex Data Center Fabric Bridge

NVMe-oF Controllers



RapidFlex A2000



RapidFlex C2000

Device Type	ASIC Fabric Bridge Device	Half-height / half-length NVMe Adapter
Network Interface	vDual Ports 100 / 50 / 25 GbE	
PCIe Interface	PCIe Gen 4 x 16 lanes	
NVMe Capability	NVMe 1.4 Compatible NVMe-oF 1.1 Compatible TCP and RoCEv2	
Dimension	25mm BGA	129.41mm x 68.95mm
Features	Bridges NVMe to NVMe-oF running on Ethernet Fabrics Enables Composable Disaggregated Infrastructure (CDI)	

Ultrastar Transporters

Data Transport Servers



Ultrastar Transporter

Device Type	Data Transporter and Edge Storage
Maximum Storage	24 Ultrastar DC SN650 NVMe SSDs 15.36TB per SSD, 1 DW/D, ISE (Instant Secure Erase)
Network Interface	Dual Port 200GbE QSFP112
Memory	128GB DDR4 ECC DRAM
Display	Six-button, LCD/Character
Management	IPMI 2.0 system management Dual 10GBase-T RJ-45

¹ One gigabyte (GB) is equal to 1,000MB (one billion bytes) and one terabyte (TB) is equal to 1,000GB (one trillion bytes) when referring to solid-state capacity. Accessible capacity will vary from the stated capacity due to operating environment.² Endurance rating based on DW/D using 4KiB random write workload over 5 years.

² Endurance rating based on DW/D using 4KiB 100% random write and JESD 219 workloads over 5 years.

³ Based on internal testing. Performance will vary by capacity point, changes in useable capacity, or security option. Consult product manual for further details. All performance measurements are in full sustained mode and are peak values. Subject to change.

⁴ MTBF and AFR specifications are based on a sample population and are estimated by statistical measurements and acceleration algorithms under typical operating conditions for this drive model. MTBF and AFR ratings do not predict an individual drive's reliability and do not constitute a warranty.

⁵ Idle specification is based on use of Idle_A

⁶ Based on internal testing; performance may vary depending on host environment, drive capacity, logical block address (LBA), and other factors. 1MiB = 1,048,576 bytes (2²⁰), 1MB = 1,000,000 bytes (10⁶)

⁷ Final MTBF and AFR specifications will be based on a sample population and are estimated by statistical measurements and acceleration algorithms under typical operating conditions, typical workload and 40°C device-reported temperature. Derating of MTBF and AFR will occur above these parameters, up to 550TB/year and 60°C (device reported temperature). MTBF and AFR ratings do not predict an individual drive's reliability and do not constitute a warranty.



©2024 Western Digital Corporation or its affiliates. All rights reserved. Western Digital, the Western Digital logo, ArticFlow, HelioSeal, IsoVibe, OpenFlex, and Ultrastar are registered trademarks or trademarks of Western Digital Corporation or its affiliates in the US and/or other countries. The NVMe and NVMe-oF word marks are trademarks of NVM Express, Inc. References in this publication to Western Digital products, programs, or services do not imply that they will be made available in all countries. Product specifications provided are sample specifications that are subject to change and do not constitute a warranty. Pictures shown may vary from actual products. All other marks are the property of their respective owners.

5601 Great Oaks Parkway
San Jose, CA 95119, USA
www.westerndigital.com/support